



DATASHEET

U-DQ(ZN)BH 50/125 μ OM3 5000N

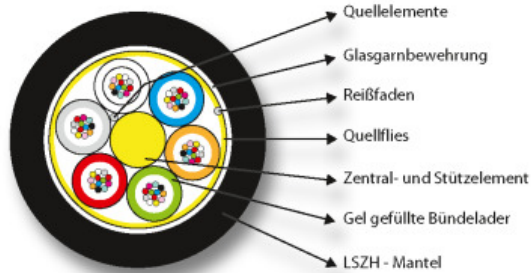

Description

Application:

For fixed installation indoor and outdoor
 In cable ducts, tubes and interconnections
 Mechanical installation by winch is permitted only when using force meters with recording function
 Not suitable for underground laying (direct buried)

Characteristics:

Universale cable
 Suitable for connector assembly

The cable diameter can vary

General data

Application	indoor/outdoor
Blow in	No
Radial water blocking	False
Longitudinal water blocking	True
UV resistant	True
Cable metal free	True
With rodent protection	True
Circuit integrity	NoNono

DATASHEET

U-DQ(ZN)BH 50/125 μ OM3 5000N

Mechanical characteristics

Crush resistance	150 N/dm
Longitudinally watertight	3/24 m/h

Cable construction

Fibre type	Multimode 50/125
Fibre category	OM3
Type of tube	Central loose tube
Tube \varnothing	2.3 mm
Fiber marking	Colour
Tube marking	Colour
With strain relief	True
Armouring	True

Cable sheath

Material outer sheath	LSZH
Euro Class	Eca
Colour outer sheath	black
Flame retardant	According to EN 60332-1-2
Halogen free	acc. EN 60754-1/2
Low smoke	acc. to EN 61034-2
Oil resistant	No
Resistant to chemicals	False

Environmental conditions

Temperature Range (Operation)	-40 – 80 °C
Temperature Range (Storage)	-40 – 80 °C
Temperature Range (Installation)	-20 – 60 °C

Transmission characteristics

Rayleigh Backscatter Coefficient 850nm	1.483
Rayleigh Backscatter Coefficient 1300nm	1.478
IL max. (dB/km) 850nm	2.5
IL max. (dB/km) 1300nm	0.7

Standards, approvals, certifications

Harmonized standard	EN 50575
Transmission standards	IEEE 802.3 10Mbit to 100Gbit

Available variants

DATASHEET

U-DQ(ZN)BH 50/125 μ OM3 5000N

Article no.	Title	VDE-Name	Construct	Cable \emptyset Weight		Bending radius	Tensile Force
54548.1L-CPR	INFRALAN® U-DQ(ZN)BH 4x12G 50/125 μ , OM3, LSZH black CPR Eca	U-DQ(ZN)BH 4x12G50/125	48G (4 x 12) Multimode OM3	11.2 mm	130 kg/km	170 mm	5000 N

accessory

39926.1	Miller® Fiber Cleaning Tapes
---------	------------------------------